



GRILLE GUARD END PLUG KIT PART NUMBER P200


| <u>QTY</u> | <u>PARTS DESCRIPTION</u> | <u>QTY</u> | <u>PARTS DESCRIPTION</u> |
|------------|----------------------------|------------|-------------------------------------|
| 2 | 5/16 X 1-1/4 FENDER WASHER | 2 | WA3 / WASHER 1-1/2 OD X 1/2 ID |
| 2 | 5/16 HEX NUTS | 2 | 1-1/2 5/16 -18 TUBE CONNECTOR |
| 2 | 5/16 LOCK WASHER | 2 | 5/16 X 1-3/4 FLAT SOCKET HEAD SCREW |
| 2 | 5/16 FLAT WASHER | | |

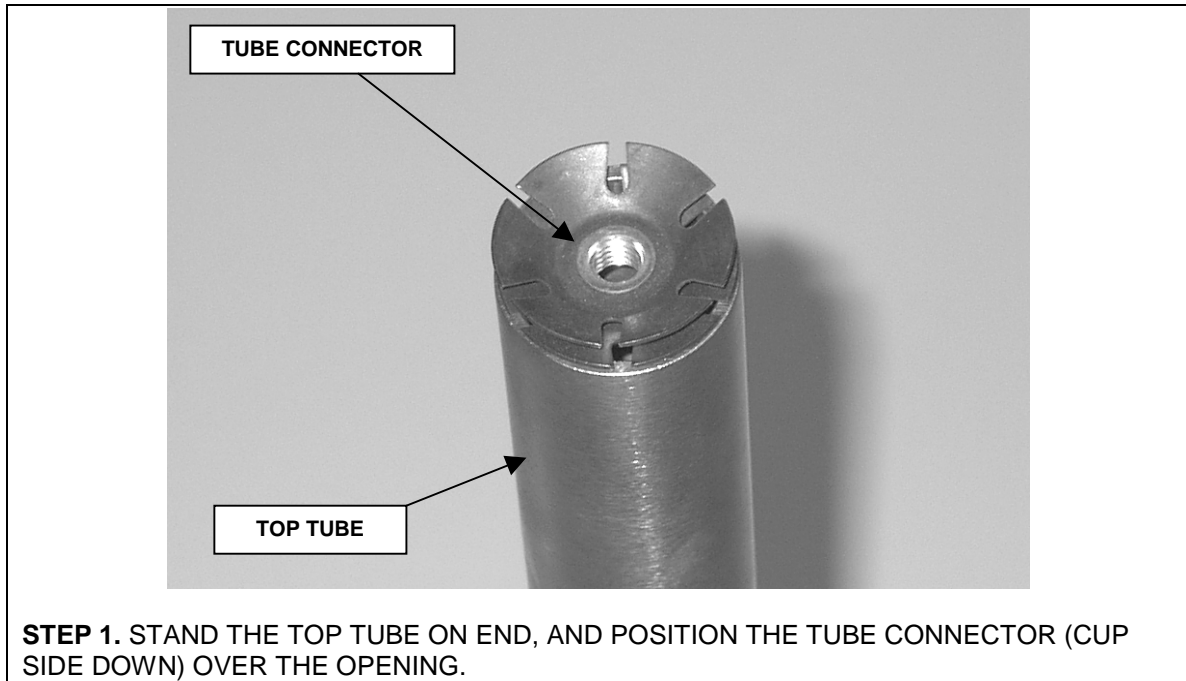

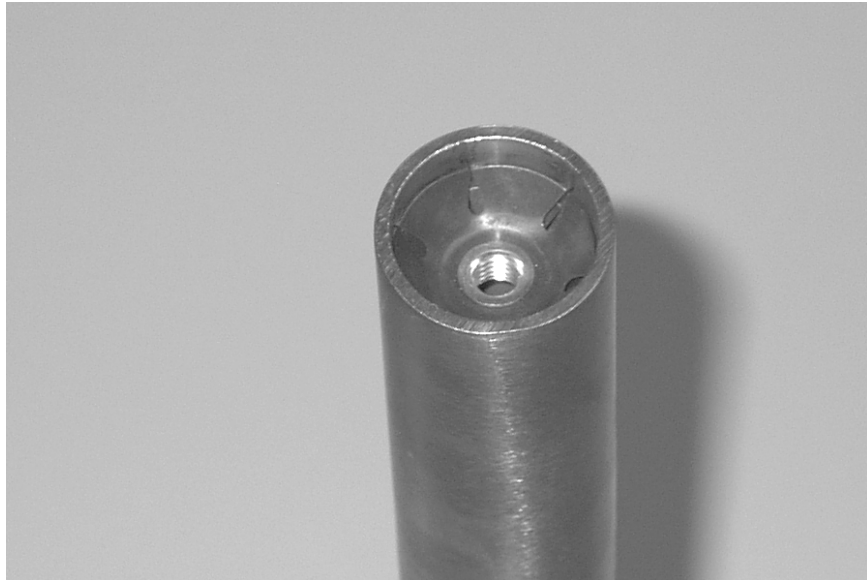


STEP 3. HOLD THE SCREW DRIVER IN LINE WITH THE TUBE, AND CAREFULLY HIT THE END WITH A HAMMER, TO DRIVE THE TUBE CONNECTER INTO THE TUBE. (APPROXIMATELY ¼" BELOW THE END)


REPEAT THE ABOVE STEPS FOR THE OPPOSITE END.

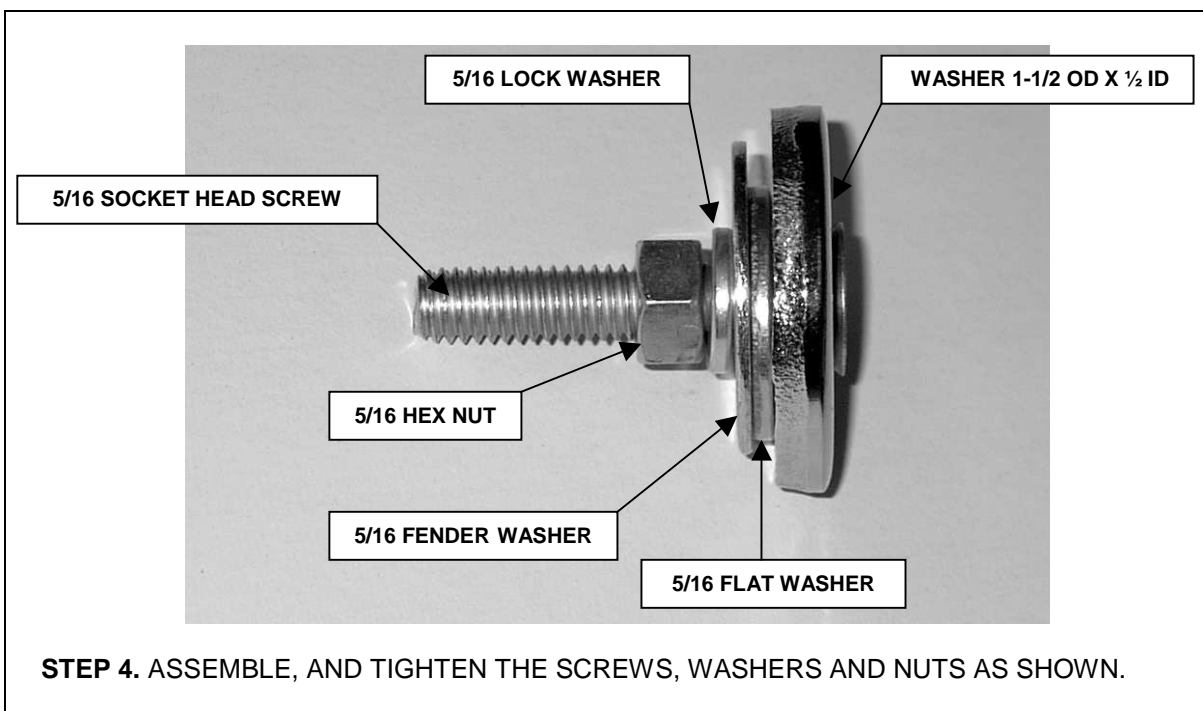

STEP 4. ASSEMBLE, AND TIGHTEN THE SCREWS, WASHERS AND NUTS AS SHOWN.

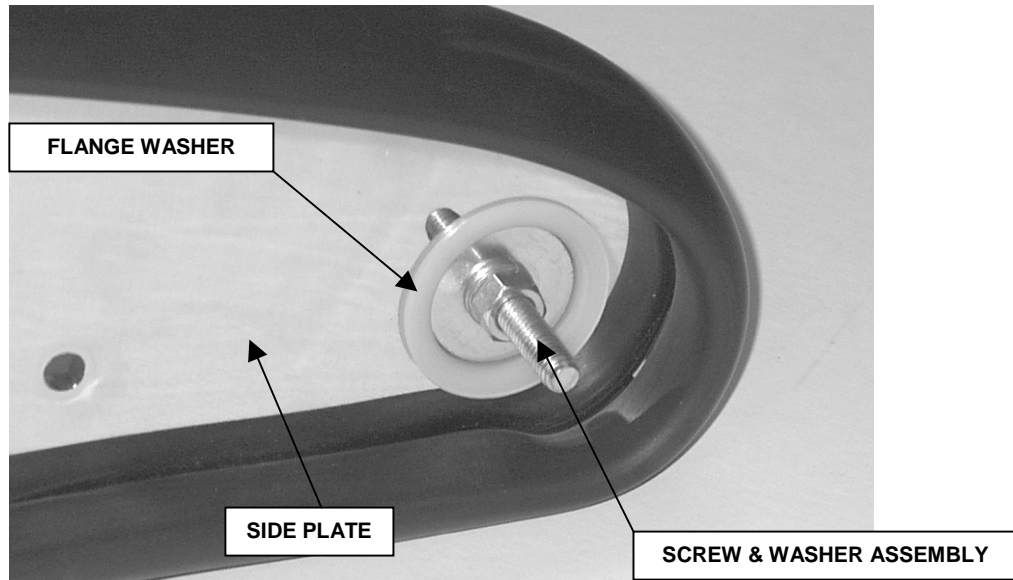

STEP 5. INSERT THE FLANGE WASHERS IN THE SIDE PLATES.

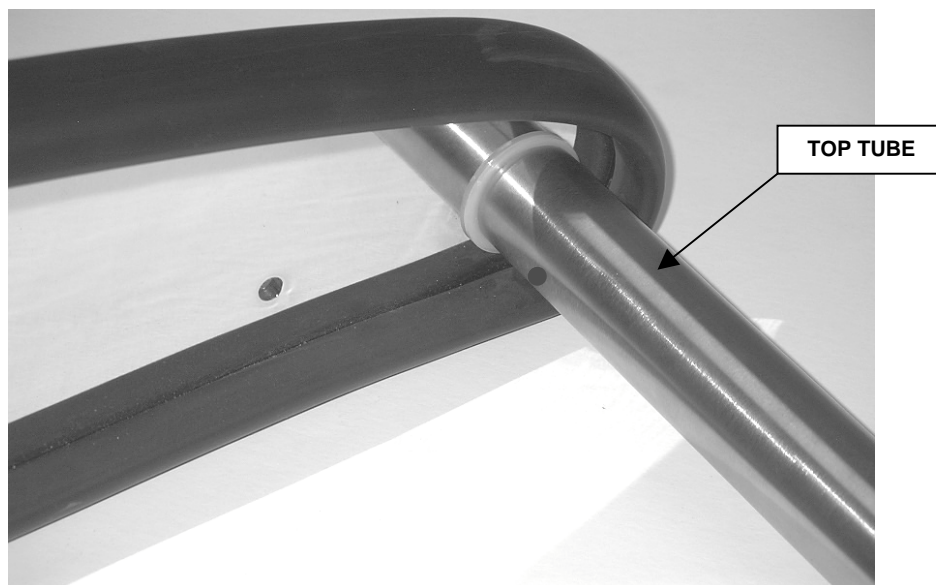

STEP 6. POSITION THE TOP TUBE BETWEEN THE GRILLE GUARD SIDE PLATES. SECURE THE TOP TUBE TO THE SIDE PLATES USING THE SCREW AND WASHER